


agrofog®



Quality down to the last detail for a reliable technique
in plant protection and pest control

ULV Cold Fogger



Electric motor with 230/240 V,
50/60 Cycles, 700 Watts
Net Weight 3,8 kg
H x W: 40 x 35 cm
Solution tank Ø 25 cm
Tank contents 4 l
Connection cable, approx. 3 m
Output infinitely adjustable
from 0,3 - 15 l/h
Other Voltages available
upon request

QUALITY

The most important quality features
of our "ULV Cold Fogger" are:

- manufactured from strong durable resistant thermoplastics
- more powerful electric motor producing greater aerosol volume at high velocity with deeper penetration
- more uniform droplet spectrum
- droplet size can be regulated by increasing or decreasing the solution flow

CHARACTERISTICS

Due to these characteristics our
"ULV Cold Fogger" offers the
following advantages:

- highly versatile and the ideal equipment for the application of insecticides, disinfectants, deodorants and even aggressive chemicals
- the range of the fog is deeper than with comparable units
- the range of application includes space and surface treatment
- easy handling and operating the unit


APPLICATION

Fields of application, e.g.:

- catering trade
- food industry
- horticulture
- livestock protection
- public health
- public services and utilities
- recreation facilities
- storage warehouses
- transportation
- vaccination of poultry
- workplaces and waste disposals



PRODUCT FEATURES:

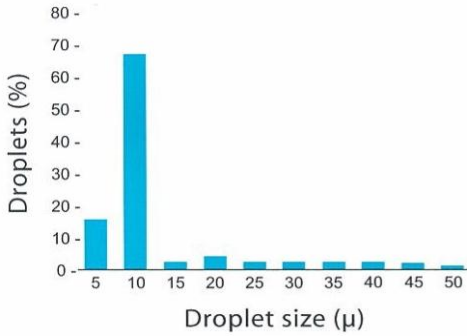

AGROFOG ULV COLD FOGGER always produces an optimum spray with droplets diameters between 1 and 30 microns. Droplets of less than 10 microns account for more than 70% of the total quantity produced, and those around 20 microns are less than 10%.



Unique two-stage aerosol nozzle produces high quality mist with droplet size varying between 1 and 30 microns giving maximum results with minimum chemical usage



Chemical resistant filter for ensured durability




High quality 'star' paper air filter prevents motor damage and corrosion



Water resistant power switch



Semi-transparent solution reservoir for greater visibility of solution level



Precision flow regulator with 'click' movement allows accurate dosage



Wide reservoir opening for easy cleaning



Strong metal clamp ring secures reservoir to body firmly. 45° tiltable angle

- all parts are constructed from high grade thermoplastic for long lasting performance.

- water and oil based solution compatible.



Regional Office:



Agro Technic Pte Ltd

No. 32 Ang Mo Kio Industrial Park 2 #01-01
Sing Industrial Complex Singapore 569510
Tel: (65) 6482 1828 Fax: (65) 6481 2631
Email: agro@agrotech.com.sg Website: www.agrotech.com

Malaysia Office:



Agrofog Sdn. Bhd

No. 18 Jalan PJS 11/14 Bandar Sunway Industrial Park
46150 Subang Jaya Selangor Malaysia
Tel: 03-56388486 Fax: 03-56388491
Email: agrotec@po.jaring.my Website: www.agrofog.com